

ABB component drives

ACS50, 0.18 to 2.2 kW / 0.25 to 3 hp

Technical catalogue



ABB

ABB component drives




ABB component drives

ABB component drives meet the requirements of OEMs, installation companies and panel builders. These drives are components that are bought together with other components from a logistical distributor. The drives are stocked, and the number of options and, variants is optimized for logistical distribution.

Highlights

- No programming - easy and descriptive interface
- Compact and slim
- Ideal for DIN-rail mounting
- Suitable for domestic environment as standard
- Silent motor

Applications

- Fans
- Pumps
- Gate control
- Material handling
- Conveyors

Features	Benefits	Notes
No programming	Faster set-up Easier configuration Easier drive for new users	All the inverter parameter settings are done with DIP switches and potentiometers
Compact and slim	Less space required for installation	0.18 to 0.37 kW 45 mm width 0.75 kW 67.5 mm width 1.5 to 2.2 kW 70 mm width
Removable mounting clip	Flexible and easy mounting	Removable clip allows DIN-rail and wall mounting from back and side of the unit
EMC	Low EMC emissions	1 st environment EMC filters as standard
Automatic switching frequency	Provides lowest possible noise without decreased derating of the drive	Increases switching frequency automatically, when drive temperature is decreased

Ratings, types and voltages



P_N kW	P_N hp	Output current		Input current	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		nominal A	max A	A							

Inbuilt EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V

0.18	0.25	1.4	2.1	4.4	ACS50-01E-01A4-2	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	6.9	ACS50-01E-02A2-2	A	170	146.5	45	128	0.7
0.75	1.0	4.3	6.5	10.8	ACS50-01E-04A3-2	B	170	146.5	67.5	128	0.7
1.5	2	7.6	11.4	18.2	ACS50-01E-07A6-2	D	226	203	70	159	1.1
2.2	3	9.8	14.7	22	ACS50-01E-09A8-2	D	226	203	70	159	1.1

P_N kW	P_N hp	Output current		Input current	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		nominal A	max A	A							

No EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V

0.18	0.25	1.4	2.1	4.4	ACS50-01N-01A4-2	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	6.9	ACS50-01N-02A2-2	A	170	146.5	45	128	0.7
0.75	1.0	4.3	6.5	10.8	ACS50-01N-04A3-2	B	170	146.5	67.5	128	0.7
1.5	2	7.6	11.4	18.2	ACS50-01N-07A6-2	C	194	171	70	159	1.1
2.2	3	9.8	14.7	22	ACS50-01N-09A8-2	C	194	171	70	159	1.1

P_N kW	P_N hp	Output current		Input current	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		nominal A	max A	A							


Inbuilt EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V

0.18	0.25	1.4	2.1	6.4	ACS50-01E-01A4-1	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	9.5	ACS50-01E-02A2-1	A	170	146.5	45	128	0.7

P_N kW	P_N hp	Output current		Input current	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
		nominal A	max A	A							


No EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V

0.18	0.25	1.4	2.1	6.4	ACS50-01N-01A4-1	A	170	146.5	45	128	0.55
0.37	0.5	2.2	3.3	9.5	ACS50-01N-01A4-1	A	170	146.5	45	128	0.6

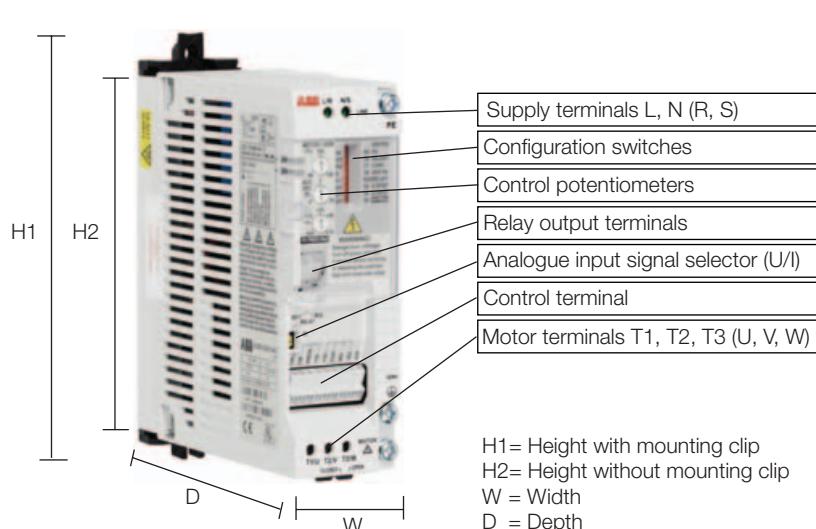

H1 = Height with mounting clip
H2 = Height without mounting clip
W = Width
D = Depth

Options



Potentiometer

Type code
ACS50-POT



EMC filter for 1st and 2nd environment

External EMC filter for frame sizes A and B to comply the European EMC regulations with long motor cables.

Type code	Height mm	Width mm	Depth mm	Weight kg
ACS50-IFAB-01	146.5	45	128	0.7




Input and output chokes

Type code	Frame size	Choke type		Max. motor cable length ¹⁾	
		Input choke	Output choke ²⁾	with choke (m)	without choke (m)
Inbuilt EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V					
ACS50-01E-01A4-2	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01E-02A2-2	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01E-04A3-2	B	CHK-B1	ACS-CHK-B3	100	75
ACS50-01E-07A6-2	D	CHK-C1	ACS-CHK-C3	100	75
ACS50-01E-09A8-2	D	CHK-D1	ACS-CHK-C3	100	75
No EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V					
ACS50-01N-01A4-2	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01N-02A2-2	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01N-04A3-2	B	CHK-B1	ACS-CHK-B3	100	75
ACS50-01N-07A6-2	C	CHK-C1	ACS-CHK-C3	100	75
ACS50-01N-09A8-2	C	CHK-D1	ACS-CHK-C3	100	75
Inbuilt EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V					
ACS50-01E-01A4-1	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01E-02A2-1	A	CHK-B1	ACS-CHK-B3	75	50
No EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V					
ACS50-01N-01A4-1	A	CHK-A1	ACS-CHK-B3	75	50
ACS50-01N-02A2-1	A	CHK-B1	ACS-CHK-B3	75	50

¹⁾ To comply with European EMC regulations, motor cable length has to be limited as specified in the ACS50 User's Guide

²⁾ The maximum switching frequency with output chokes is 5 kHz

Technical specification



Mains connection		Control connections	
Power range	0.18 to 2.2 kW	One analog input	
Voltage	1-phase, 110 to 120 V and 200 to 240 V, +10/-15%	Voltage signal	0 (2) to 10 V, 200 kΩ single-ended
Frequency	48 to 63 Hz	Current signal	0 (4) to 20 mA, 100 Ω single-ended
Motor connection		Potentiometer reference value	
Voltage	3-phase, from 0 to U _{SUPPLY} (for 110/120 V from 0 to 230 V)	Response time	10 V ±2% max. 10 mA, 1 kΩ ≤ R ≤ 10 kΩ ≤ 60 ms
Frequency	0 to 120/130 Hz	Resolution	0.1%
Overload capacity	150% (60 s)	Accuracy	±1%
Switching frequency		Three digital inputs	
Standard	5 kHz, adjustable up to 16 kHz with automatic switching frequency reduction	Input impedance	12 V DC with internal or 12 to 24 V DC external supply, PNP 1.5 Ω
Acceleration time	0.1 to 30 s	Response time	≤ 9 ms
Deceleration time	0.1 to 30 s	One relay output	
		Switching voltage	12 to 250 V AC or max 30 V DC
		Maximum continuous current	2 A
Environmental limits		Product compliance	
Ambient temperature	0 to 40°C with nominal current and 5 kHz switching frequency	Low Voltage Directive 73/23/EEC with supplements	
up to 50°C -20°C	with derating with restrictions	EMC Directive 89/336/EEC with supplements	
Altitude	Nominal current : 0 to 1000 m reduced by 1% per 100 m over 1000 m to 2000 m	Quality assurance system ISO 9001 and Environmental system ISO 14001	
Relative humidity	lower than 95% (without condensation)	CE, UL, cUL, C-Tick and GOST R approvals	
Degree of protection	IP20		
Contamination levels	No conductive dust allowed, corrosive liquids or gases (IEC60721-3-3)		
EMC standards in general			
EN 61800-3/A11 (2000), product standard	EN 61800-3 (2004), product standard	EN 55011, product family standard for industrial, scientific and medical (ISM) equipment	
1 st environment, unrestricted distribution	Category C1	Group 1 Class B	
1 st environment, restricted distribution	Category C2	Group 1 Class A	
2 nd environment, unrestricted distribution	Category C3	Group 2 Class A	
2 nd environment, restricted distribution	Category C4	Not applicable	

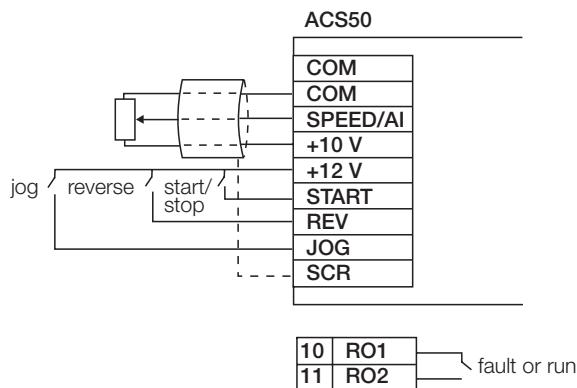




ABB Oy

Drives

P. O. Box 184

FI - 00381 Helsinki

Finland

Telephone +358 10 22 11

Fax +358 10 222 3764

Internet <http://www.abb.com/motors&drives>